

B

C

E


公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-05-03	李国常

SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 10MΩ max
- HOUSING
- Part No: H2005-2*NP
 - Poles: 04-40
 - Material: Nylon 66 UL94V-0

Part No	Dimensions (mm)	
	A	B
H2005-2*02	2.00	5.90
H2005-2*03	4.00	7.90
H2005-2*04	6.00	9.90
H2005-2*05	8.00	11.90
H2005-2*06	10.00	13.90
H2005-2*07	12.00	15.90
H2005-2*08	14.00	17.90
H2005-2*09	16.00	19.90
	18.00	21.90
	20.00	23.90
	22.00	25.90
	24.00	27.90
	26.00	29.90
	28.00	31.90
	30.00	33.90
H2005	32.00	35.90
	34.00	37.90
	36.00	39.90
	38.00	41.90

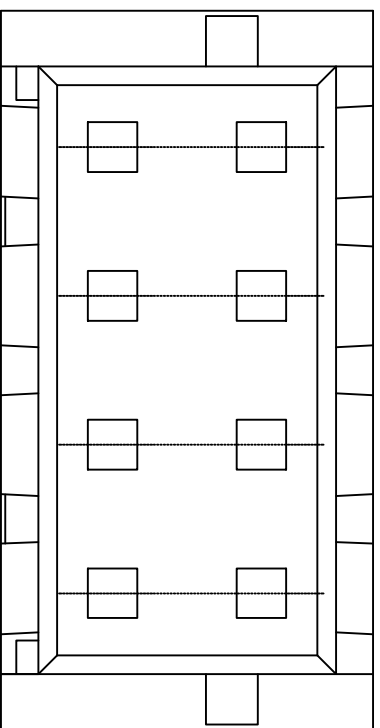

KLT 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

VER No SIZE

A A4

TITLE	成品规格图	
CHECKED BY	DATE	SCALE
	2016-05-03	1:1
DRAWN BY	UNIT:mm	
李国常	PART No	H2005-2*NP

4

4

B

C

D

E

F

1

