

B

C

E


公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-15	李国常

SPECIFICATIONS

- Voltage rating: 50V AC, DC
 - Current rating: 1A AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -40°C~+85°C
 - Contact resistance: 20MΩ max
- WAFER
- Part No: W1001SR-NP
 - Poles: 02-24
 - Material: Nylon 6T UL94V-0
 - Ter Material: Phosphor Bronze /Tin-plated

Part No	Dimensions (mm)	
	A	B
W1001SR-02	1.00	5.00
W1001SR-03	2.00	5.00
W1001SR-04	3.00	6.00
W1001SR-05	4.00	7.00
W1001SR-06	5.00	8.00
W1001SR-07	6.00	9.00
W1001SR-08	7.00	10.00
W1001SR-09	8.00	11.00
	9.00	12.00
	10.00	13.00
	11.00	14.00
	12.00	15.00
	13.00	16.00
	14.00	17.00
	15.00	18.00
W1001SR-16	15.00	18.00
W1001SR-17	16.00	19.00
	17.00	20.00
	18.00	21.00
	19.00	22.00
	23.00	23.00

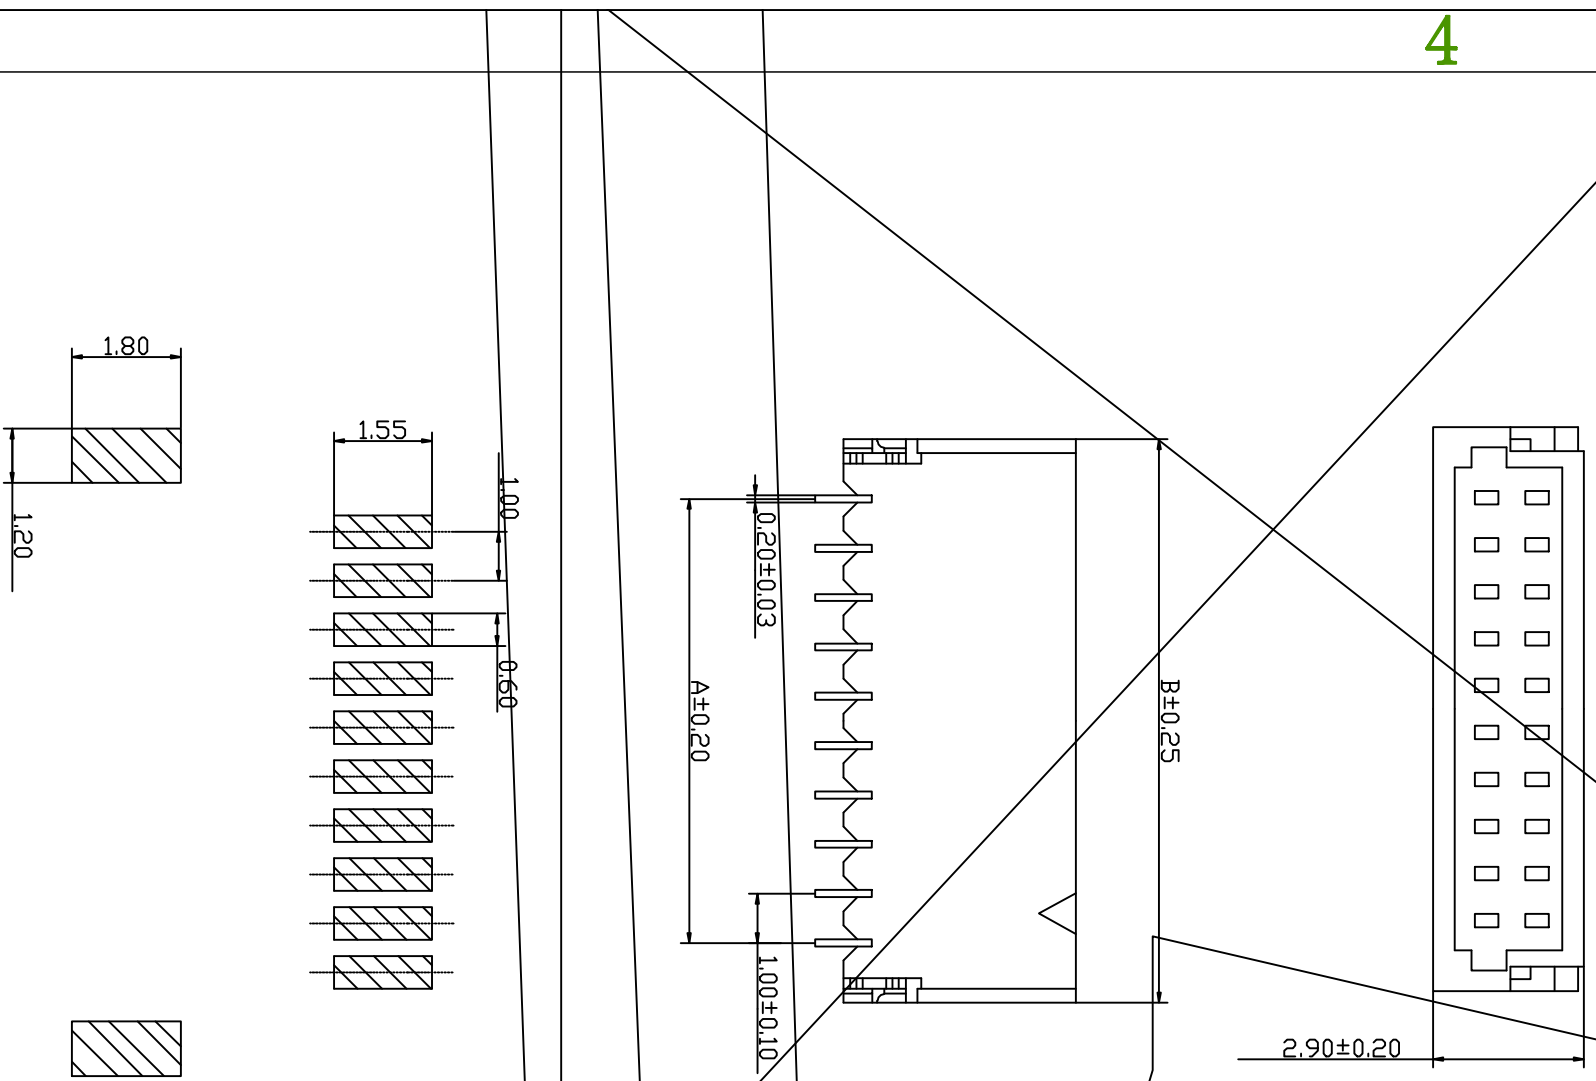

PCB LAYOUT

KLIT 深圳市康利通电子科技有限公司

TITLE	成品规格图	TOLERANCE	
CHECKED BY	DATE	0±0.30	
		.0±0.25	
		.00±0.20	
		.000±0.015	

CHECKED BY	DATE	SCALE	VER No	SIZE
	2016-04-15	1:1	A	A4

DRAWN BY	UNIT:mm	PART NO	W1001SR-NP
----------	---------	---------	------------

