

B


C

E

公差表


REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-27	李国常

4

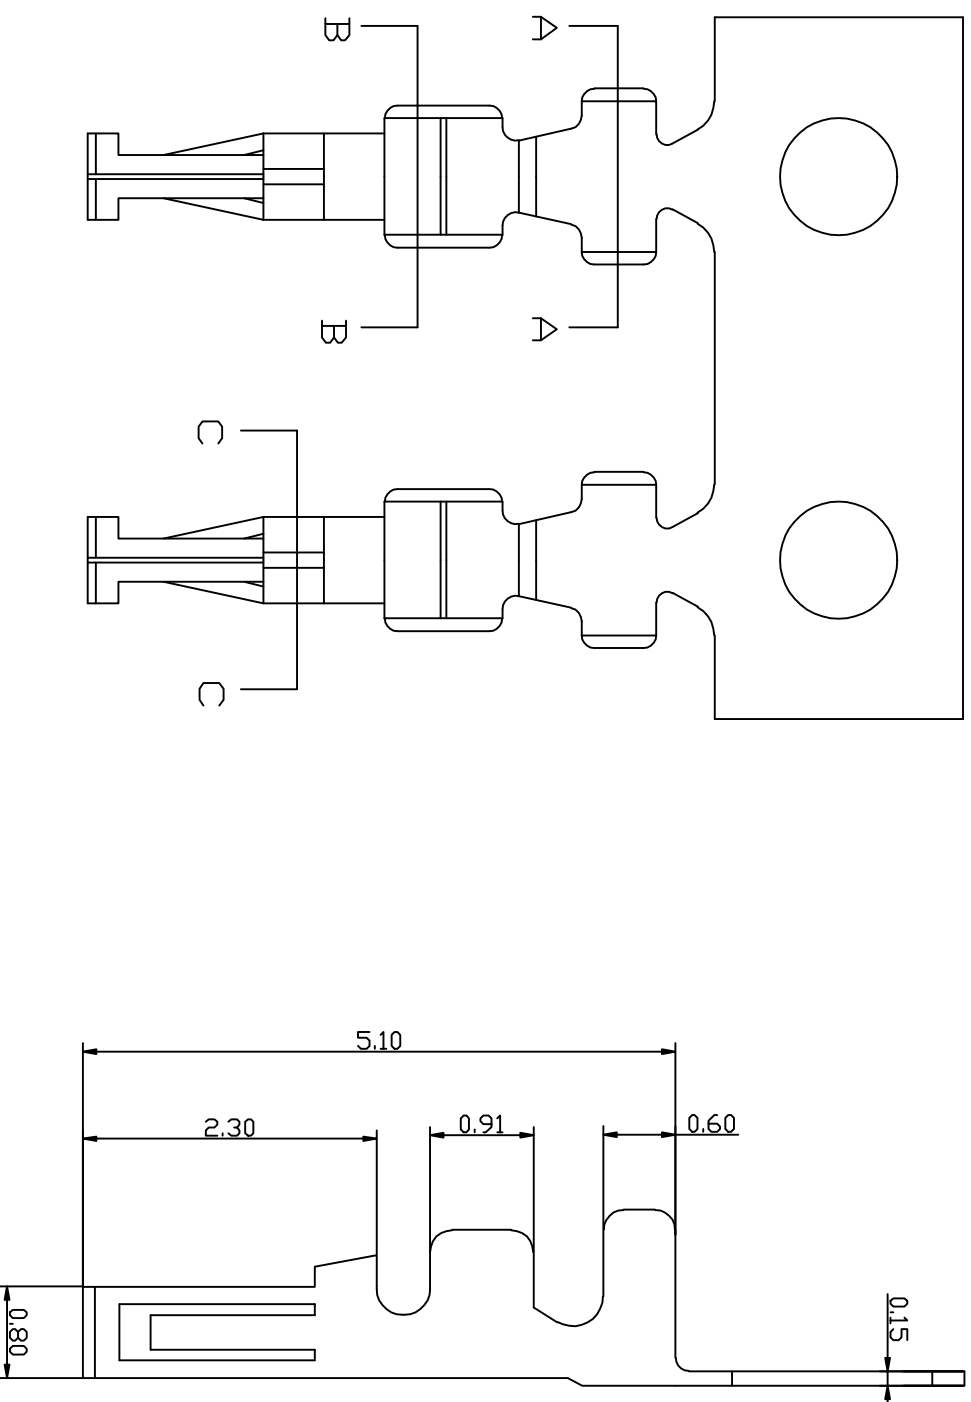


- SPECIFICATIONS**
- Voltage rating: 200V AC, DC
 - Current rating: 1A, AC, DC
 - Withstanding Voltage: 500V AC/minute
 - Insulation resistance: 100MΩ min
 - Temperature range: -40℃~+85℃
 - Contact resistance: 20MΩ max
- TERMINAL**
- Part No: T1255PG
 - Applicable wire: AWG#28-#32
 - Material: Phosphor Bronze
 - Finish: Gold-flash


4



SEC:A-A



SEC:B-B



SEC:C-C

KLT 深圳市康利通电子科技有限公司

成品规格图

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE	DATE	SCALE	VER No	SIZE
CHECKED BY	2016-04-27	1:1		
DRAWN BY	UNIT:mm		A	A4
李国常	PART No	T1255PG		

B

C

D

E

F

B

C

E

差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-27	李国常

SPECIFICATIONS

- Voltage rating: E00V AC, DC
- Current rating: 1A, AC/DC
- Withstanding Voltage: 100V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -55°C~+85°C
- Contact resistance: 200Ω max
- WAFER
- Part No: W1255R-NP
- Poles: 05-#1

4

4

B

C

D

E

F

B


C

E



公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-27	李国常


4

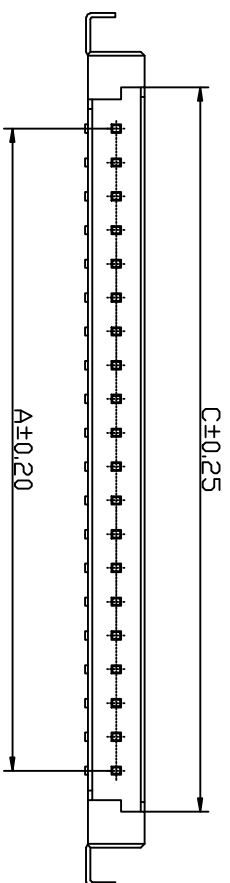

4

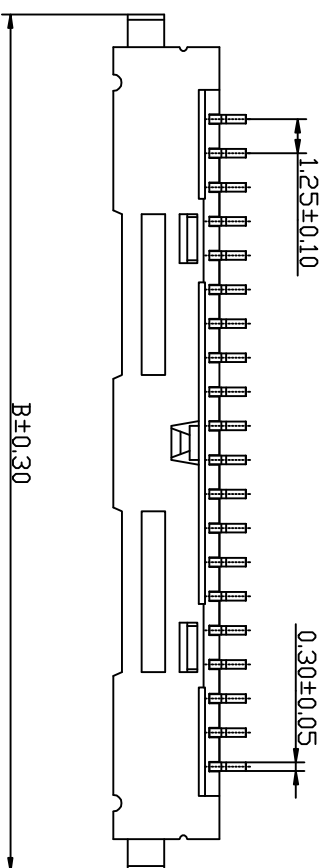

Part NO	Dimensions (mm)		
	A	B	C
H1255SR-20	23.75	31.40	26.60
H1255SR-30	36.25	43.90	39.10

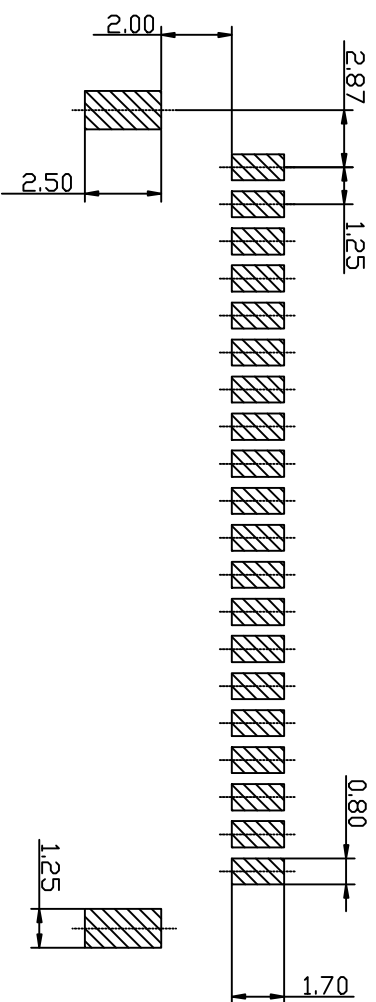

P.C.B LAYOUT

KLIT 深圳市康利通电子科技有限公司

TO CERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

1

TITLE	成品规格图		SCALE		VER No	SIZE
CHECKED BY	DATE	2016-04-27	1:1	A	A4	
DRAWN BY	UNIT:mm					
李国常	PART NO	W1255SR-NP				

B

C

D

E

F

