

公差表

DESCRIPTION	DATE	CHANGER
版本	2016-04-01	李国常

0V AC, DC  
AC, DC  
age: 500V AC/minute  
nce: 100MΩ min  
e: -40°C~+85°C  
e: 20MΩ max

4

TOLERANCE

TITLE
CHECKED BY
DRAWN BY
李国常

B C D

B


C

E

公差表

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			新版本	2016-04-01	李国常

4

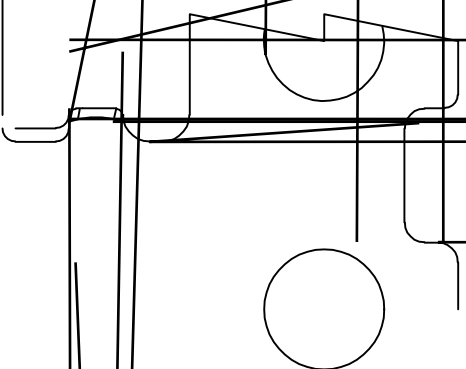

■ SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -40C~+85C
- ~~Contact resistance: 20mΩ max~~

4

■ TERMINAL

- Part No: T1007PG
- Applicable wire: AWG#28-#32
- Material: Phosphor Bronze
- Finish: Gold-flash

**KLEI** 深圳市康利通电子科技有限公司

TOLERANCE

0±0.30

.0±0.25

.00±0.20

.000±0.015

TITLE	成品规格图	
CHECKED BY	DATE	SCALE
DRAWN BY	UNIT:mm	VER No
PART NO	T1007PG	SIZE

2016-04-01


1:1

A

A4

李国常

T1007PG



A

A4

B

C

D

E

F

